


ATR 100 Tour Guide Audio System

Receiver for Tourists

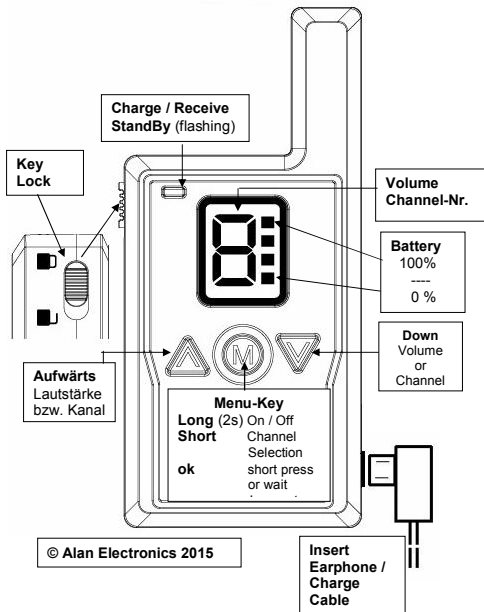

- **Volume** - select with left or right arrow button, Volume **L**evel is shown as **L** and **1..8** in flashing display. Storing: press 1 x center key (M) or simply wait 10 seconds.
- **Channel**- press M key 1 x shortly, select channel **1 – 10** (**10** is displayed as **0**) with left / right keys according to Tour Guide's advise
- **Power ON / OFF** - press 1 x M button longer

Earphone - insert Micro USB Plug of earphone on right side. The cable outlet should look down.

Charger - Receivers can be charged as pair together or separately via supplied Y cable and AC wall adaptor with USB socket. Charging also possible from any USB socket at computer or other devices with USB 5 V power supply. Maximum charge time of fully discharged battery about 5-6 hours.

Charge control - LED constant red (radio is off or locked): Charge stops automatically when battery full – LED off.
Recommended charge while radio OFF and locked

StandBy - LED flashing green every 3 seconds: Receiver is on
Battery levels 4 bars = full, 1 bar = almost empty –
4 bars flashing = battery empty and will switch off soon.

Receive - LED constant green

Lock - slide switch (left side) up – red marking visible = all settings are locked against any mal-adjustment

Unlock - slide switch down, red marking disappears = all controls are activated