




Product data sheet

15/01/2021

G11 PRO

THE WALKIE TALKIE TO COMMUNICATE IN NOISY
ENVIRONMENTS

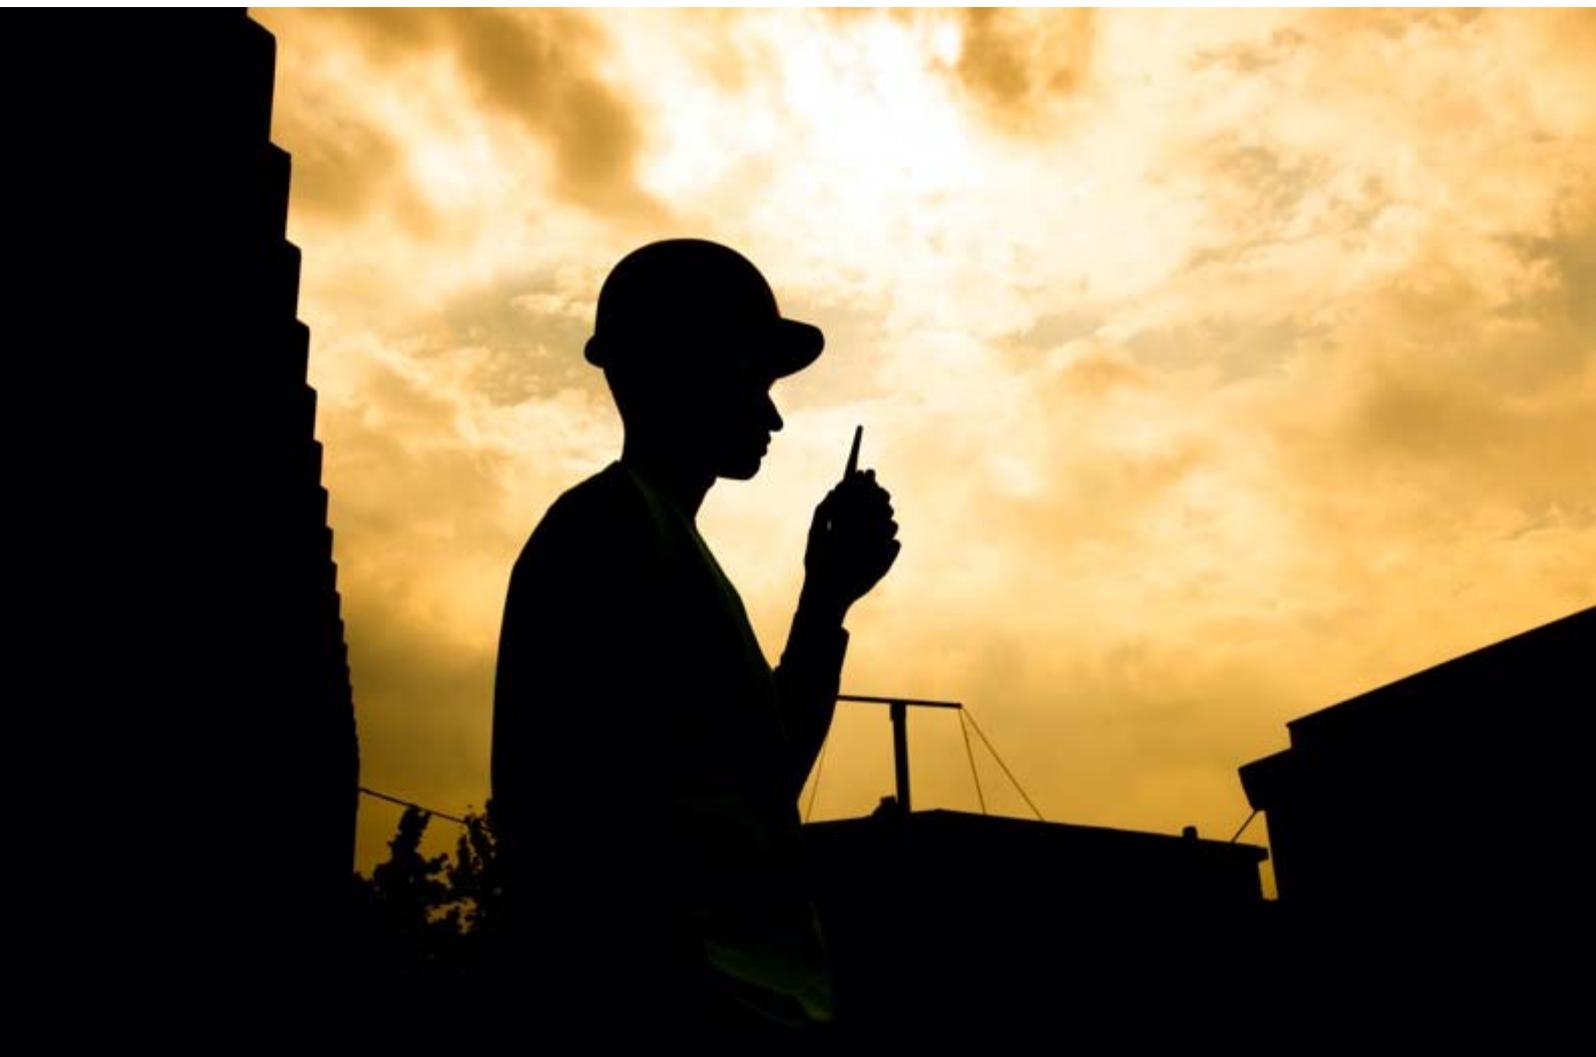

WALKIE TALKIE

G11 PRO

Do you work in noisy environments?
Are construction sites your daily
bread and do you require clear
communication?

Then relying on G11 PRO is the right
answer, to communicate clearly and
safely.

Yes, because we have improved the
audio to make it even more
performing and with the new S.O.S
function* that allows you to
transmit an emergency signal on the
channel currently in use.

It never lets you down! With its 22
hours autonomy and a voice signal
that warns you in time about the
battery level.

KEY POINTS

UNRIVALLED AUDIO

8 NEW PMR₄₄₆ CHANNELS

DISTANCE UP TO 12 KM.

22 HOURS AUTONOMY



*can be activated using (optional) programming software.

MIDLAND[®]

www.midlandeurope.com
info@midlandeurope.com

IG @MidlandItalia
FB: @MidlandItalia

WALKIE TALKIE

G11 PRO

TECHNICAL FEATURES

- Excellent audio quality
- 8 new PMR446 channels for a total of 32 channels (16+16 pre-programmed)
- Extended frequency band: from 446.00625 to 446.19375MHz
- Quick selection 16/32 channels
- Voice announcements
- 50 CTCSS tones + 105 DCS codes
- Auto power save
- Scan
- Monitor
- VOX
- 2-pin Kenwood accessories jack
- Weight: 209 g (battery included)
- Dimensions: 100 x 58 x 30 mm

SOFTWARE

Compatible with the PRG-10 programming software code C974.01

COMPLIANCE

Device in compliance with the RE-D 2014/53/EU regulation



The G11 PRO is the new radio with excellent audio quality, 8 new PMR 446 channels and an extended frequency band, from 446.00625 to 446.19375 MHz.

The features of the G11 PRO make it quick to use: from the 16/32 channel quick selection for a communication capacity switch, the VOX to start transmitting without pressing any buttons, the voice announcement of the channels and the automatic battery saving.

Of course, there are also commands to scan channels (SCAN) and monitor them (Monitor).

Many are the tones: 50 CTCSS and also the codes: 105 DCS.

Wide and complete range of accessories.

PACKAGING AND CODES

The package includes:

Transceiver with belt clip, desktop charger, wall adapter, Li-Ion 1600mAh battery pack

Code C966.06



WALKIE TALKIE

G11 PRO

DIFFERENT USES.



MIDLAND[®]

www.midlandeuropa.com
info@midlandeuropa.com


IG @MidlandWorld
FB: @MidlandWorld

WALKIE TALKIE

G11 PRO

ACCESSORIES

- MA21-LK PTT microphone with spiral cable – code C709.04
- MA21-XK Microphone with PTT – code C709.06
- MA21-Lki Microphone with L-connector – code C1306
- MA31-LK Microphone with pneumatic earphone – code C732.04
- PB-G11 Li-Ion 1600mAh battery pack – code C967
- BA24 Headset microphone – code C1296
- BA22 Speaker microphone with PTT and rotating clip – code C1297
- BA21 Adjustable earpiece microphone with PTT – code C1298
- BA31 Microphone with pneumatic earphone – code C1299
- BOW-M EVO K Military headset – code C1046.03
- WA21 Bluetooth microphone headset – code C1201
- WA31 Bluetooth microphone headset with pneumatic earphone – code C1202
- WA29 Bluetooth microphone headset with headband – code C1203
- PRG-10 Programming kit – code C974.01



PROFESSIONAL LINE G WALKIE-TALKIES



G10 PRO



G13



G11 PRO



G15 PRO



G18